

CZL601

[Date : 2010-02-15] Source : DONGGUAN SOUTH CHINA SEA ELECTRONIC CO.,LTD Read : 13048times



Rated load (kg): 3、 5、 6、 10、 15、 20、 30、 40、 50、 60、 100、 120

Main features: The product is made of alloy aluminum. It is hermetically sealed with glue to IP65, surface anodized and anti-corrosion, integral structure and easy installation. The product is suit for electronic top scale, floor scale and other weighing equipment.

Parameters:

Precision : C2/C3

Comprehensive error(%F.S) : $\pm 0.02/\pm 0.017$

Rated output(mv/v) : 2.0 ± 0.2

Creep(%F.S/30min) : $\pm 0.02/\pm 0.017$

Zero balance(%F.S) : ± 1.0

Input resistance(Ω) : 405 ± 10

Output resistance(Ω) : 350 ± 3

Insulation resistance(M Ω) : $\geq 5000(100VDC)$

Temp. effect on span(%F.S/10°C): $\pm 0.02/\pm 0.014$

Temp. effect on zero(%F.S/10°C) : $\pm 0.03/\pm 0.017$

Compensated temp. range(°C) : -10 ~ +40

Use temp. range(°C) : -20 ~ +60


Excitation voltage(V) : 9 ~ 12(DC)

Safe overload (%F.S) : 120

Ultimate overload (%F.S) : 150

Defend grade : IP65

Installation size (mm):

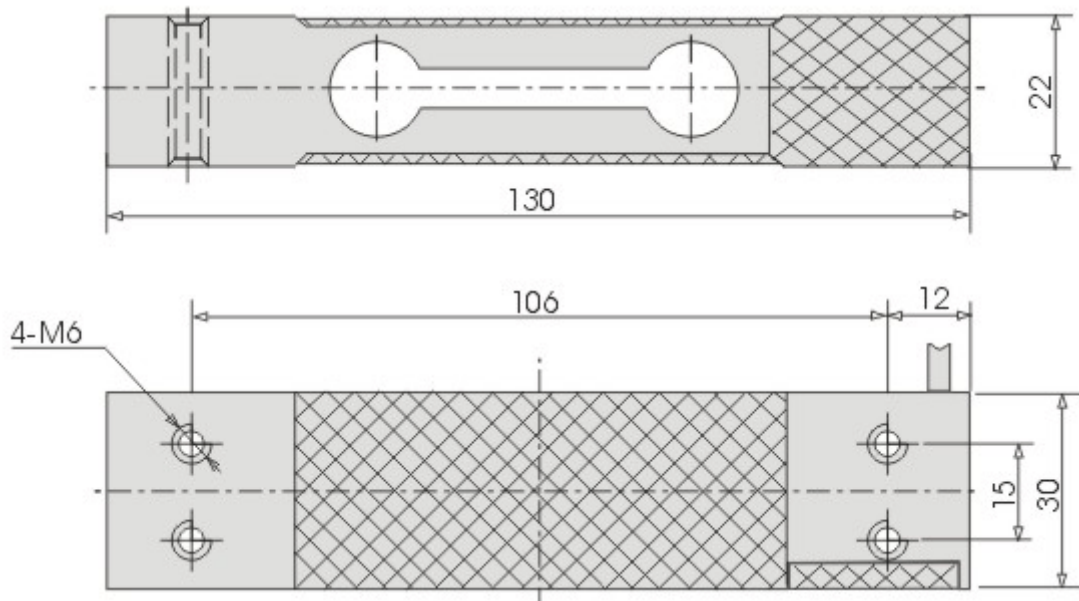

Wiring schematic diagram:

Red: Input (+) White: Output (-)

Black: Input (-) Green: Output (+)

Notes : It used 4-core shielded cable($\phi 5 \times 3000$ mm)

Load instruction:

